



60+
LIVE
COLORS



GLAMiD

Glam Your Home

ACRYLIC SHEET / EDGE BAND

RETRO

SERIES

P E R S O N I F I E D

ELEGANCE

QUALITY THAT MATTERS

6H
GRADE

1.5mm
THICKNESS



100% SCRATCH PROOF
ACRYLIC COLLECTION

RETRO SERIES



A P P L I C A T I O N S

I N D E X

SOLID Collection	01 - 08
TEXTURE Collection	09 - 14
SELF PATTERN Collection	15 - 16
METALLIC Collection	17 - 18
SUPER METALLIC Collection	19 - 20
SOFT TOUCH Collection	21 - 22
MIRROR Collection	23 - 24

KITCHEN
Worktops ♦ Tables ♦ Doors
Shelves ♦ Cabinets ♦ Trolleys



FURNITURE



HEALTHCARE
Wall Lining and Horizontal Surfaces
Lockers ♦ Cabinets ♦ Trolleys



BATHROOM
Worktops ♦ Shelves ♦ Cabinets



HOSPITALITY & RESTAURANT TABLES
Counter Tops ♦ Doors ♦ Cubicles
Lockers ♦ Cabinets



COMMERCIAL



WALL CLADDING & PARTITION

COLLECTION
Available in Size : 2440mm x 1220mm
(8 Feet x 4 Feet)

(Thickness : 1.5mm (±10-15%))

MATCHING
EDGE BAND
AVAILABLE



C O M P A N Y P R O F I L E







Glamid Decor sprouts from a desire to create beautiful spaces. Our purpose is simple to provide exclusive designs and deliver wow. The brand offers aesthetic and functional products for diverse spaces and fulfil client needs. The brand tries to bring contemporary and classic elements for creating comfortable and luxurious environment into the spaces. Our Retro Edition creates a sense of true sophistication and unmatched class.



G I V E W A Y T O E X C E L L E N C E W I T H I N Y O U R S P A C E S






100% SCRATCH PROOF
ACRYLIC COLLECTION











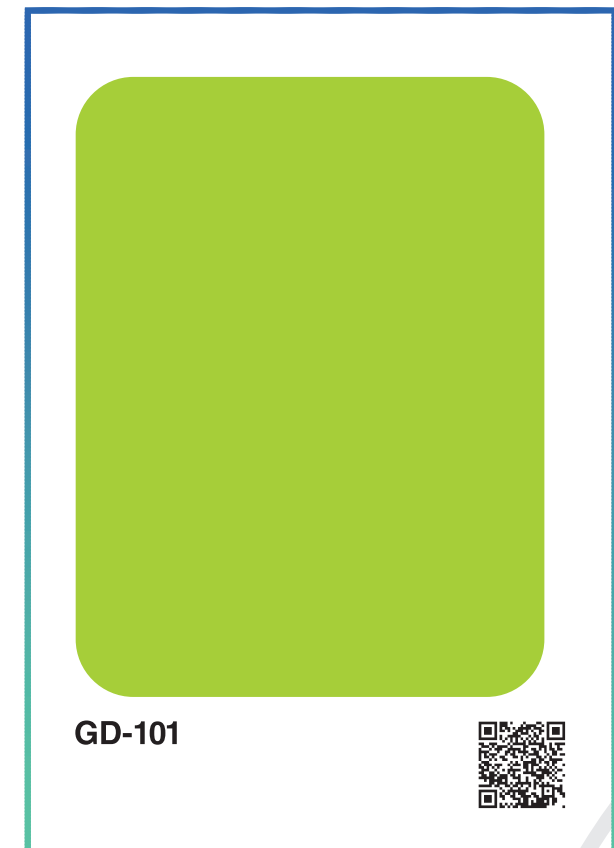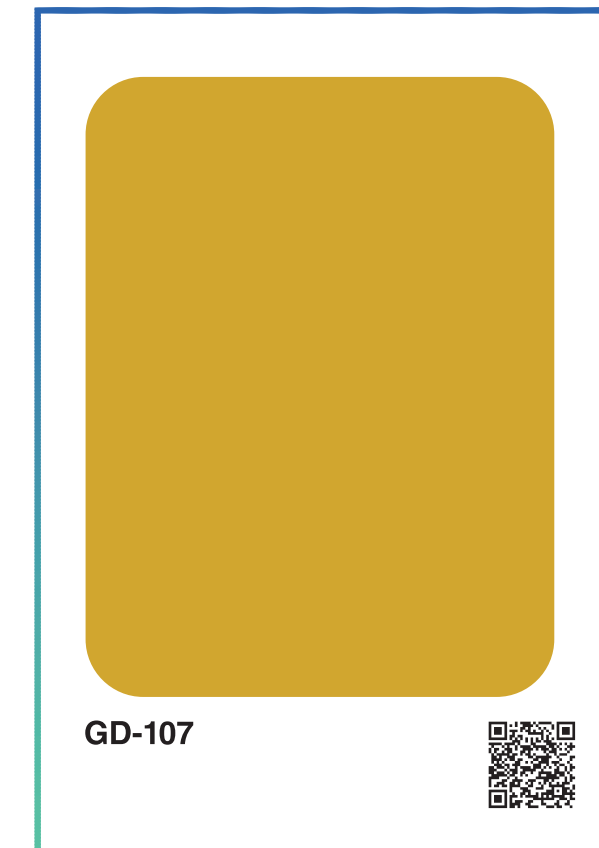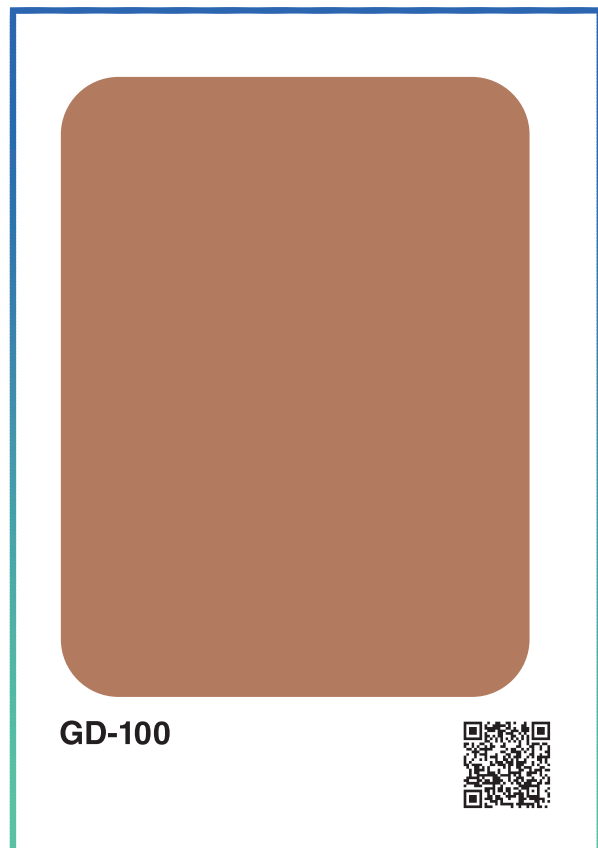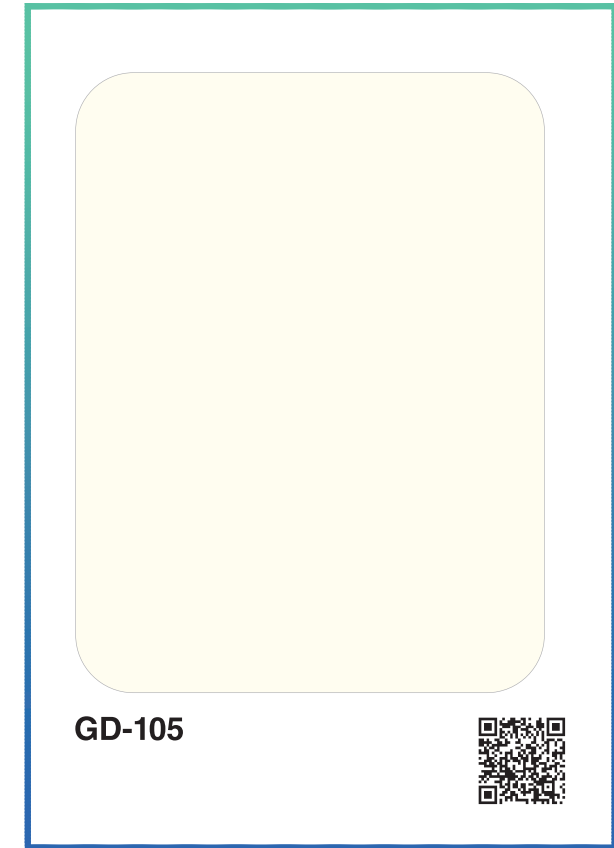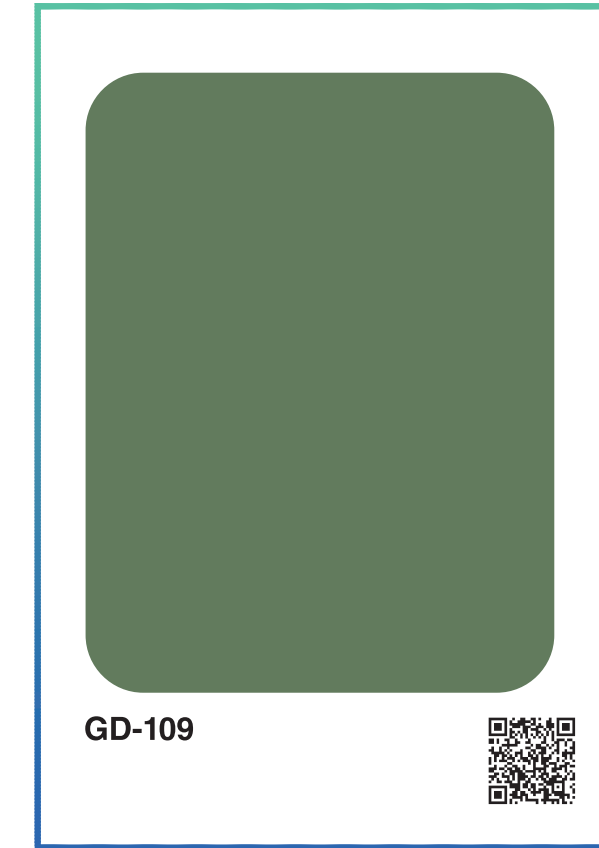
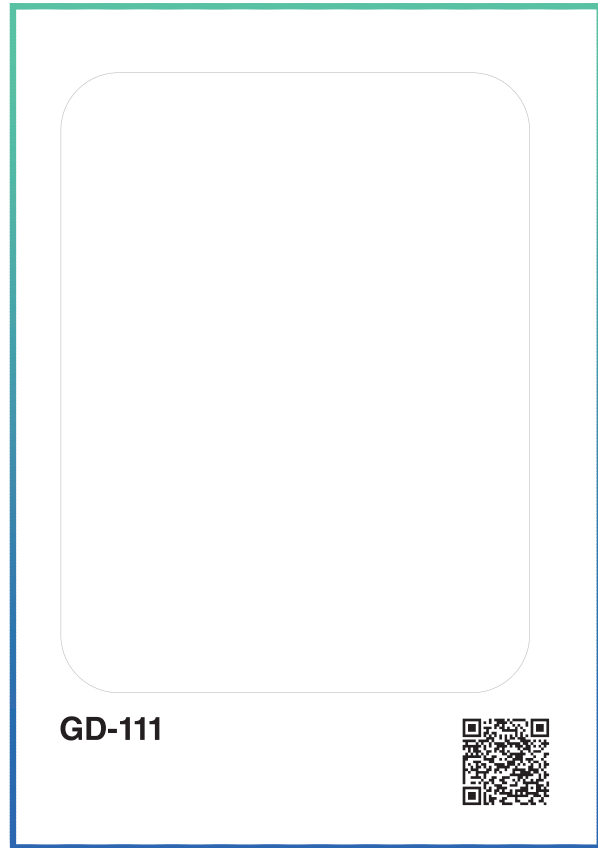


Splendid The splendid feel of these surfaces are way beyond the ordinary.


*There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variation. Actual colour of the laminate sheet may vary from this brochure.

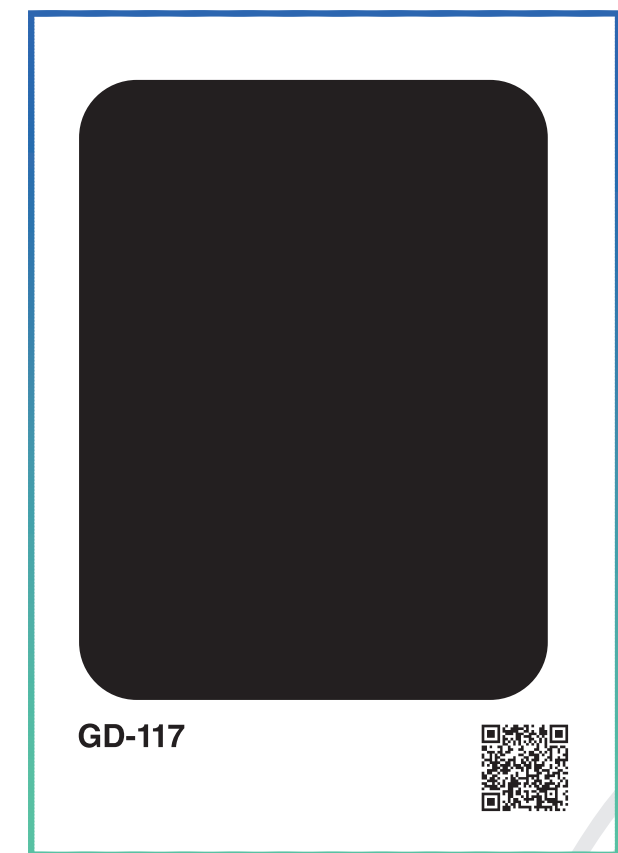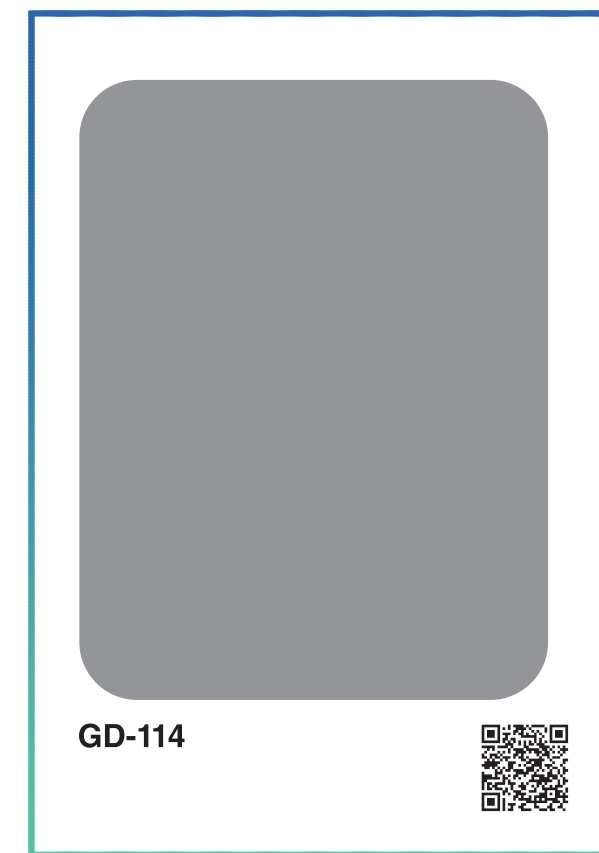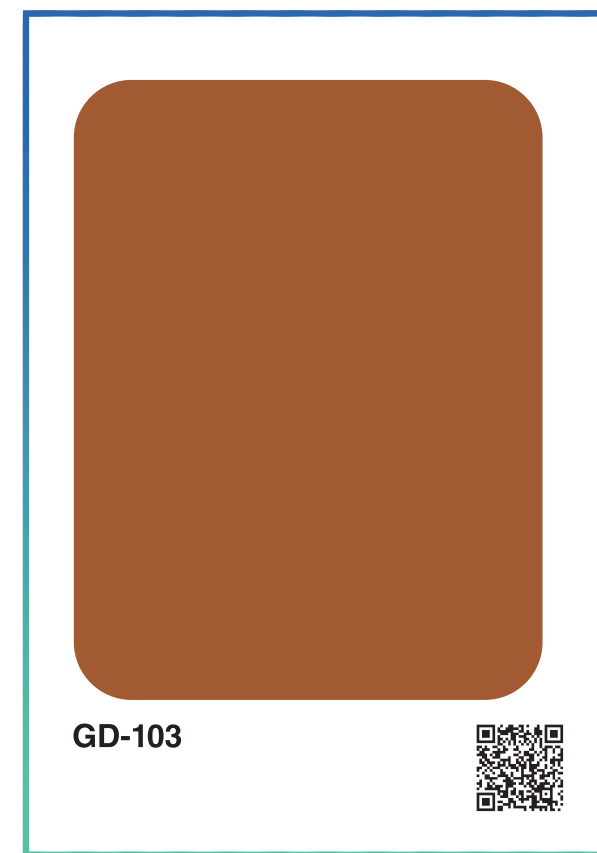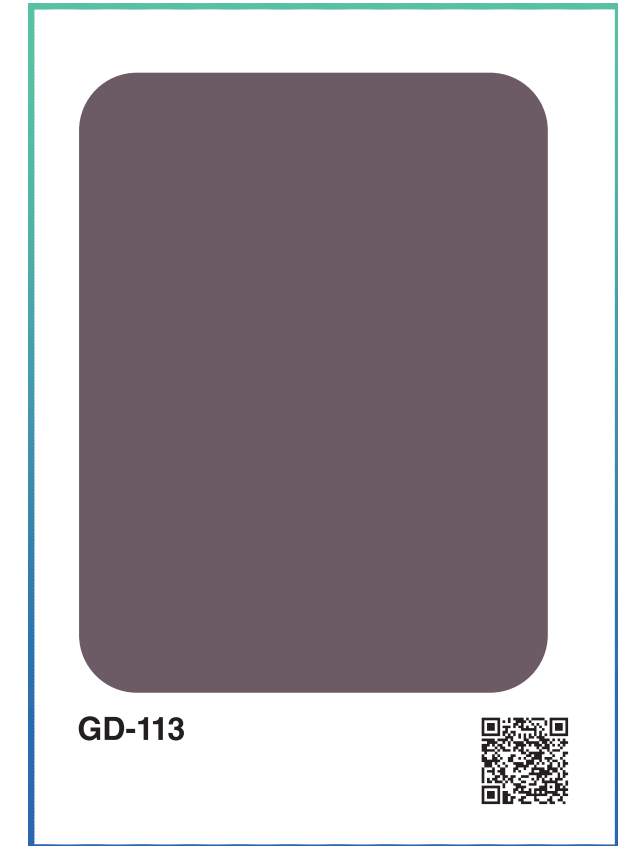
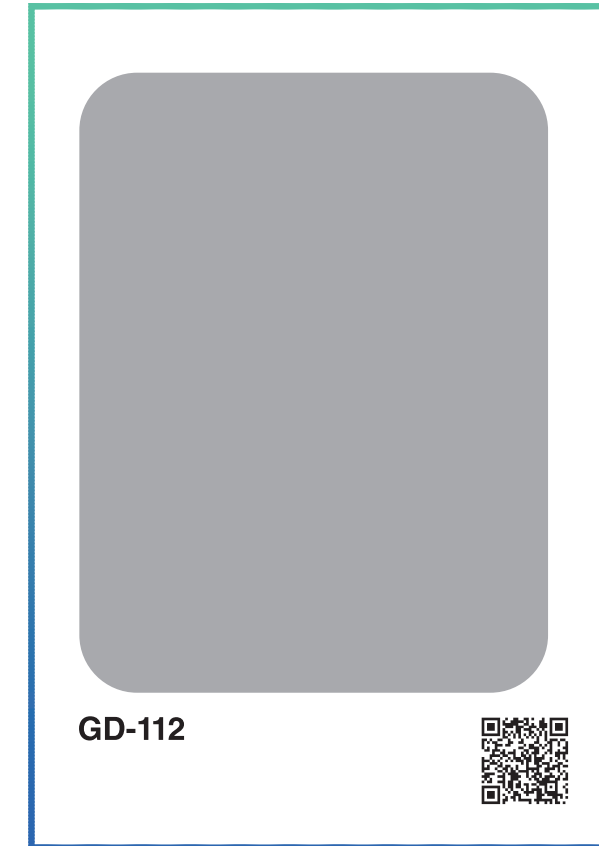


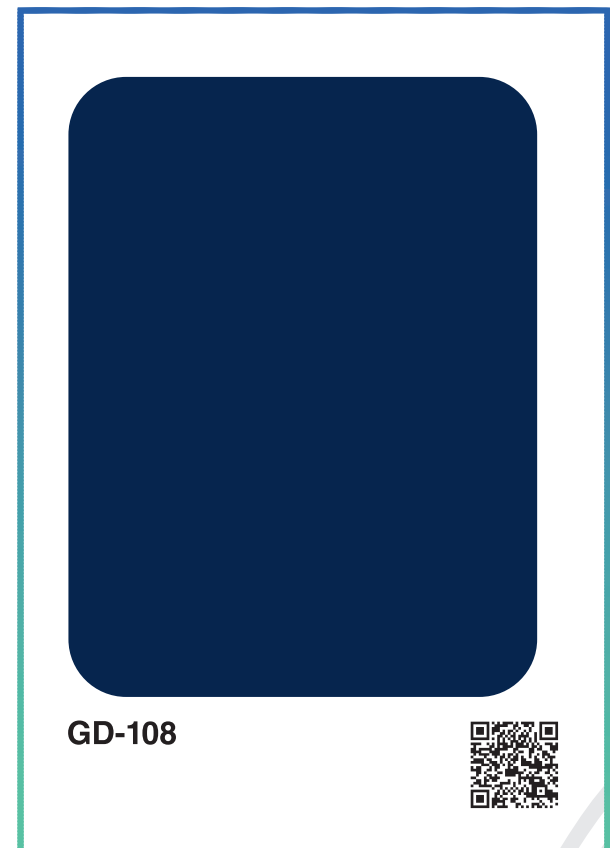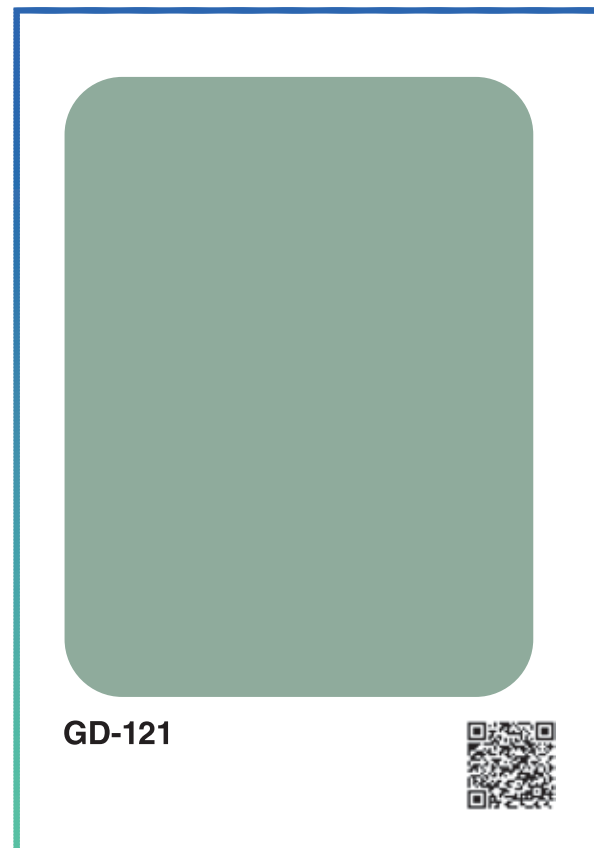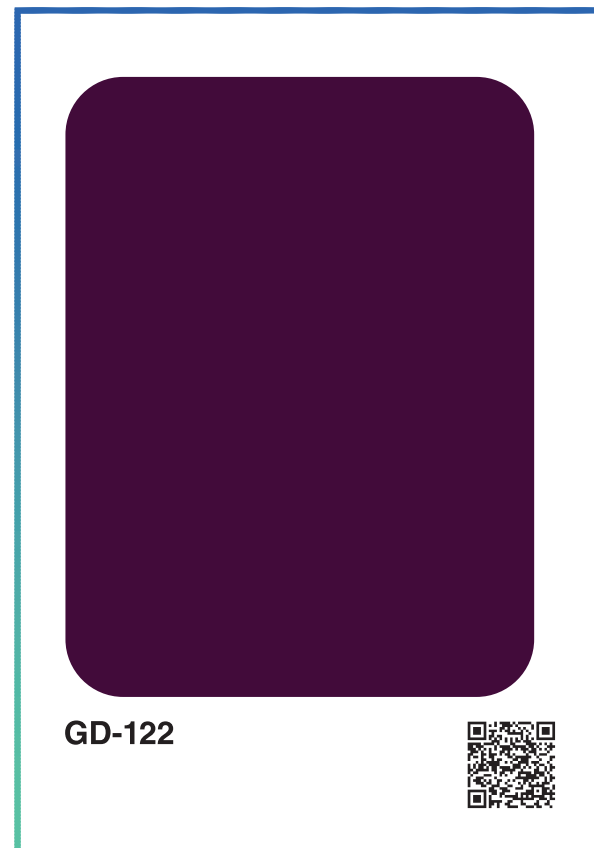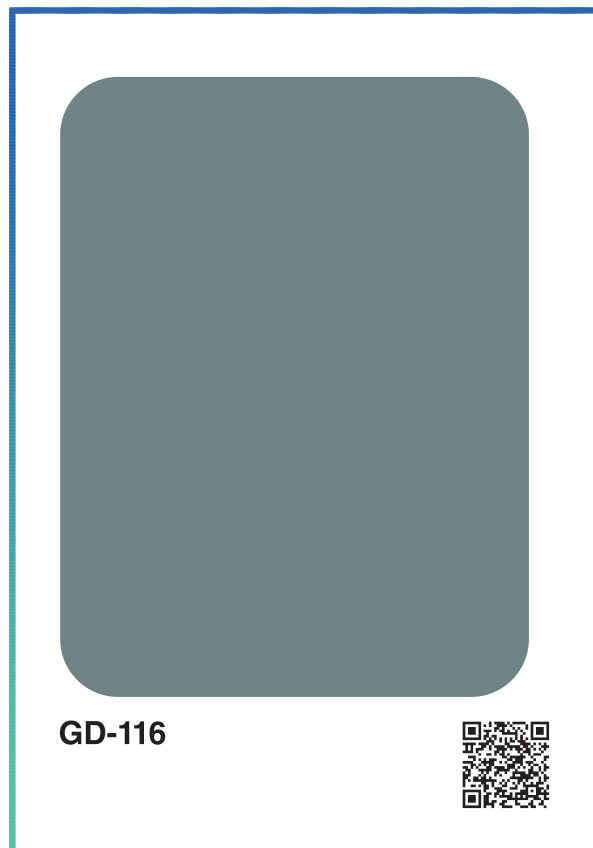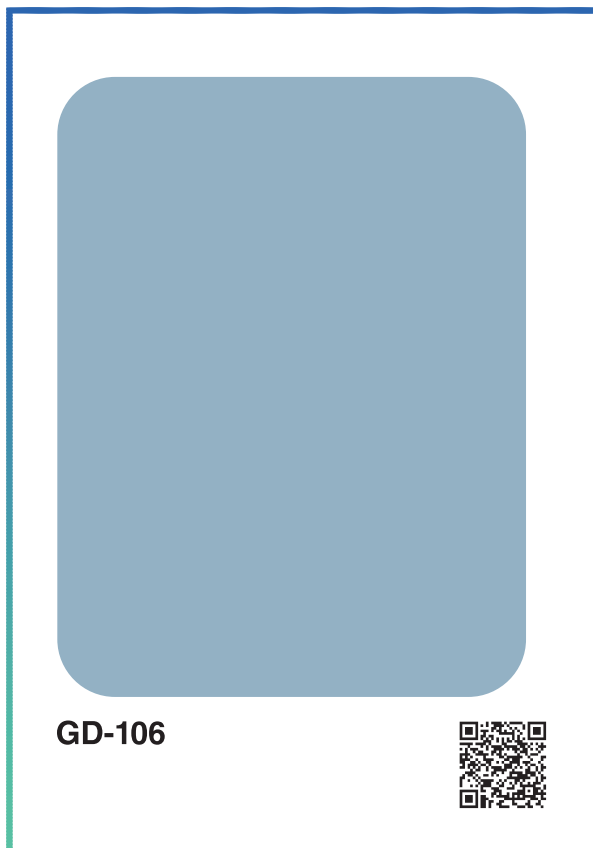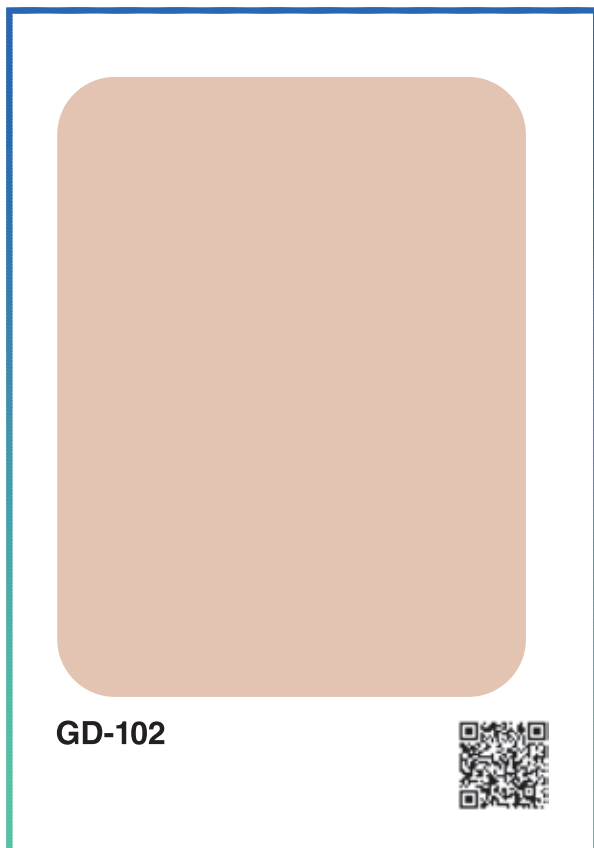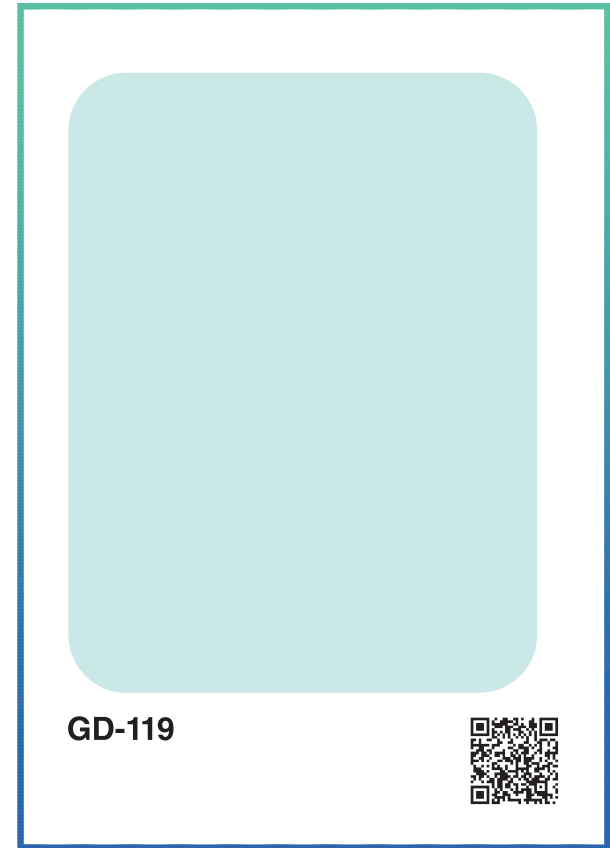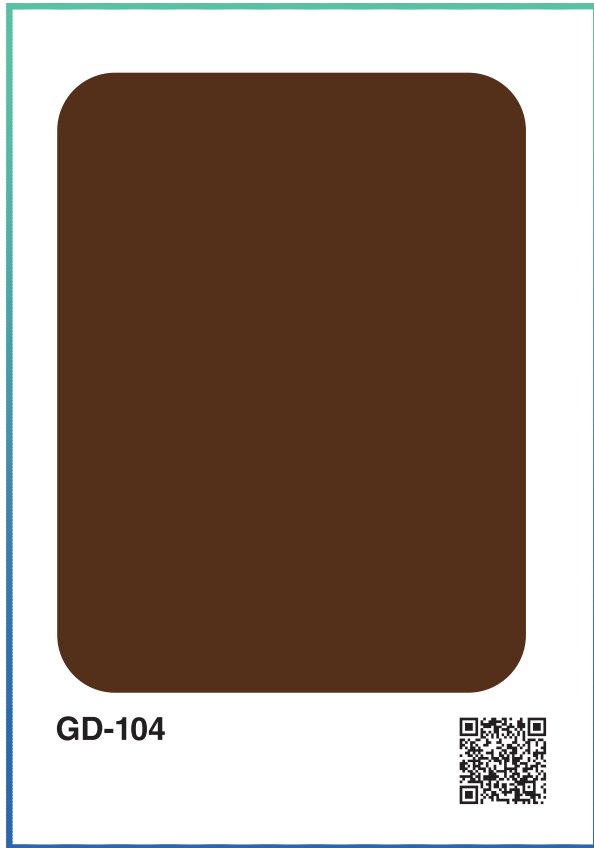

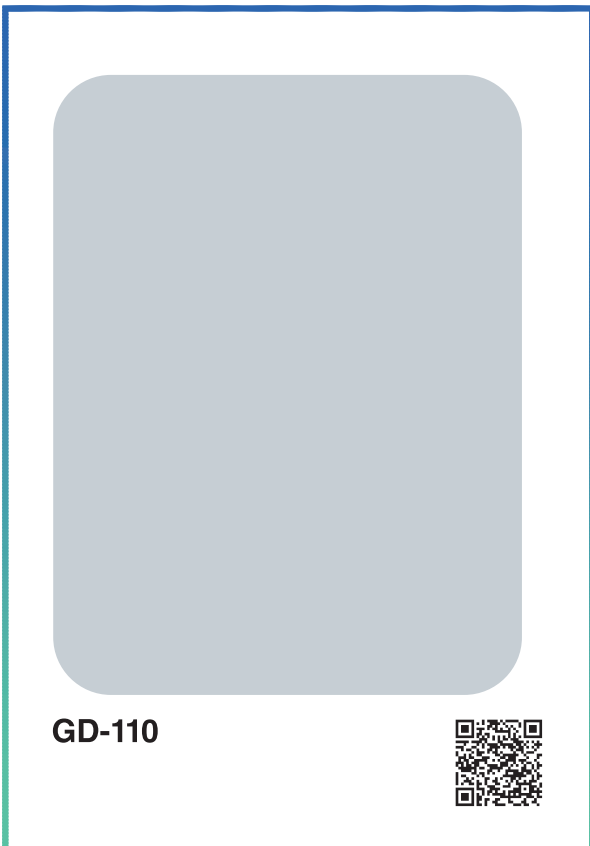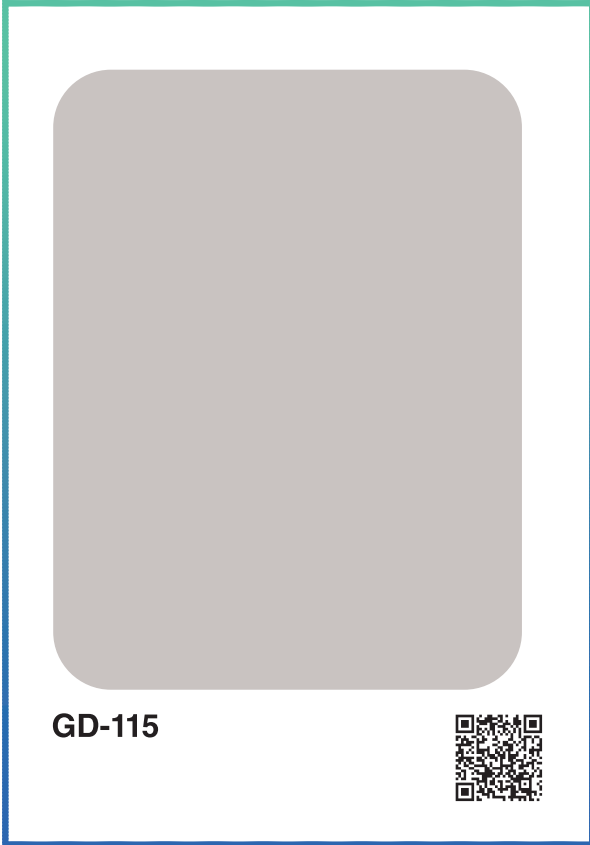





**There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variation. Actual colour of the laminate sheet may vary from this brochure.*

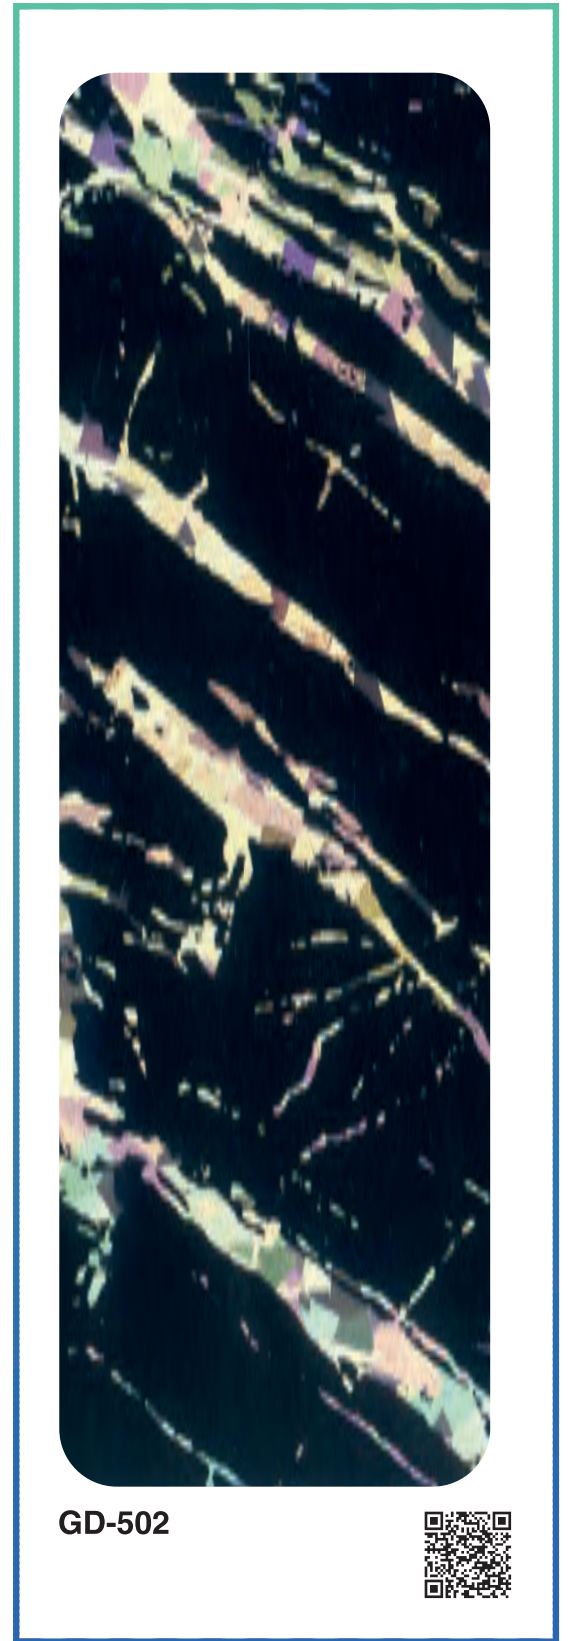

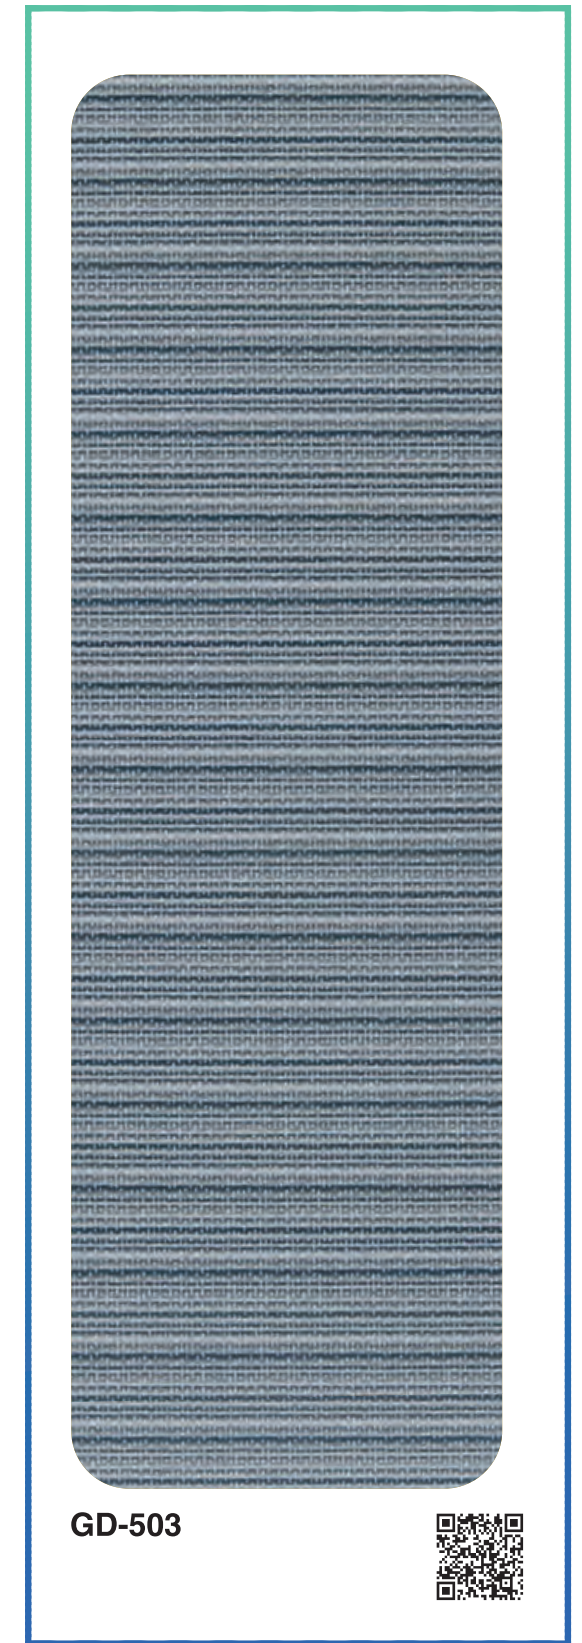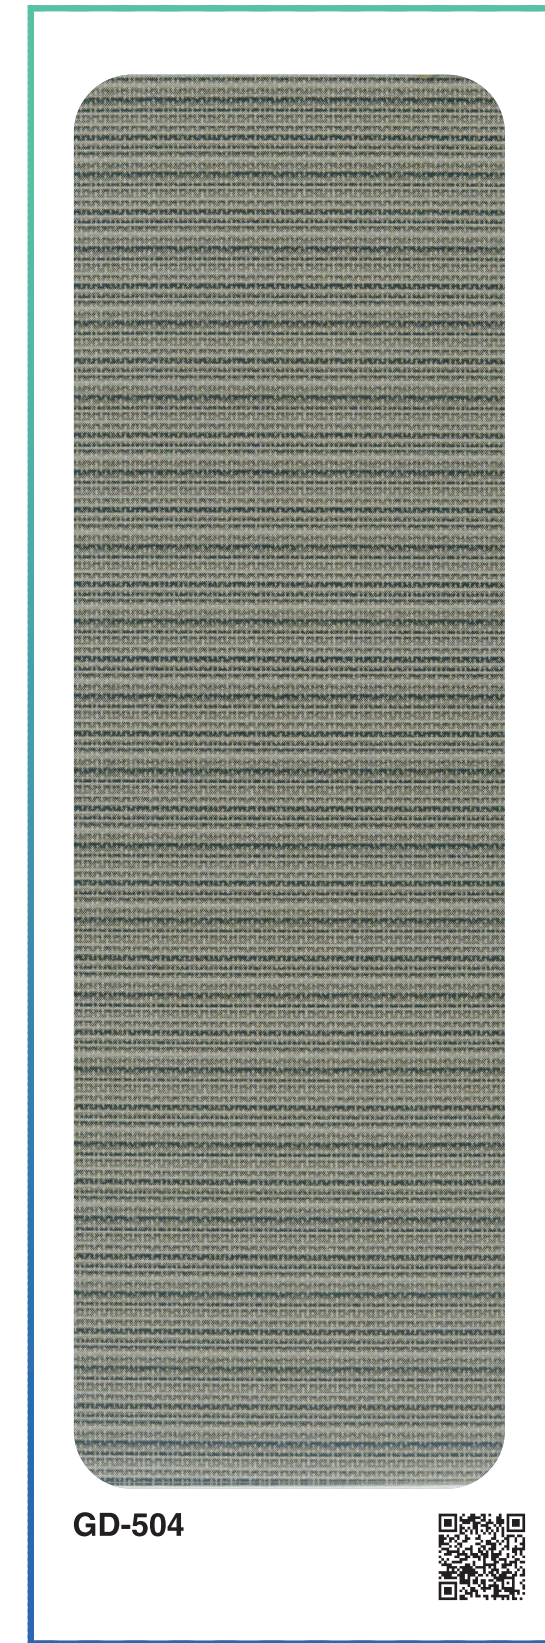






*There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variation.
Actual colour of the laminate sheet may vary from this brochure.




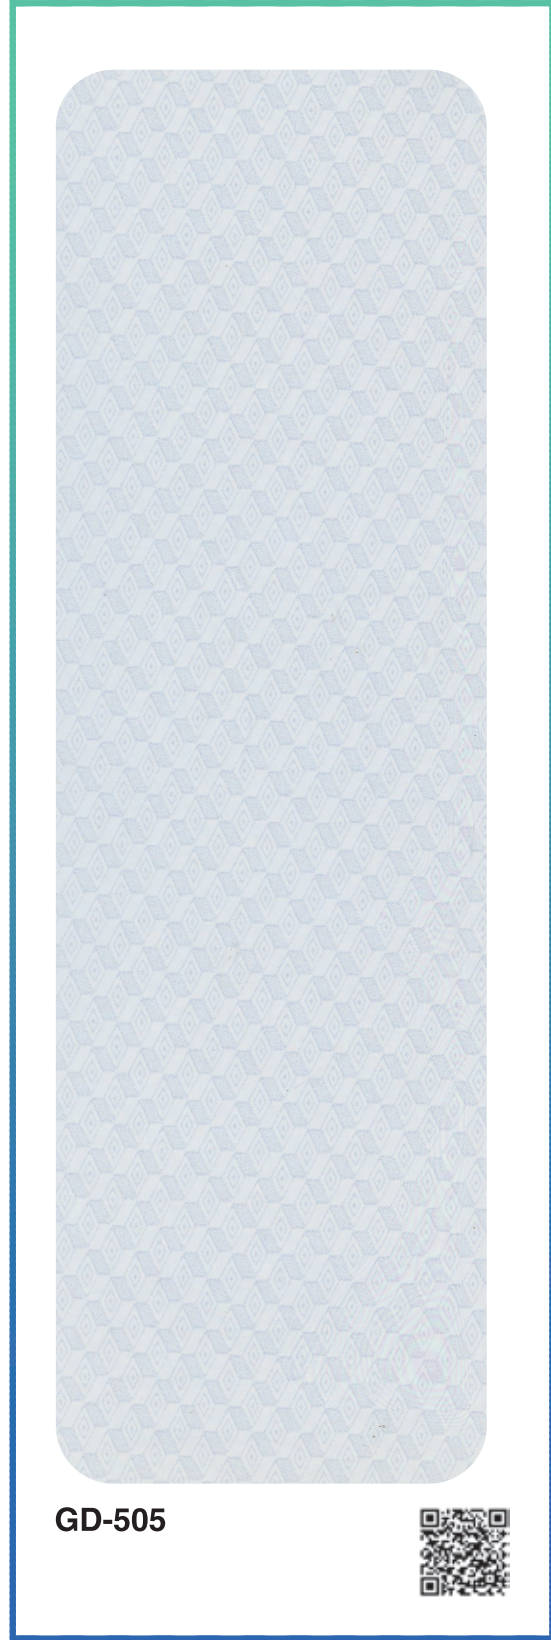







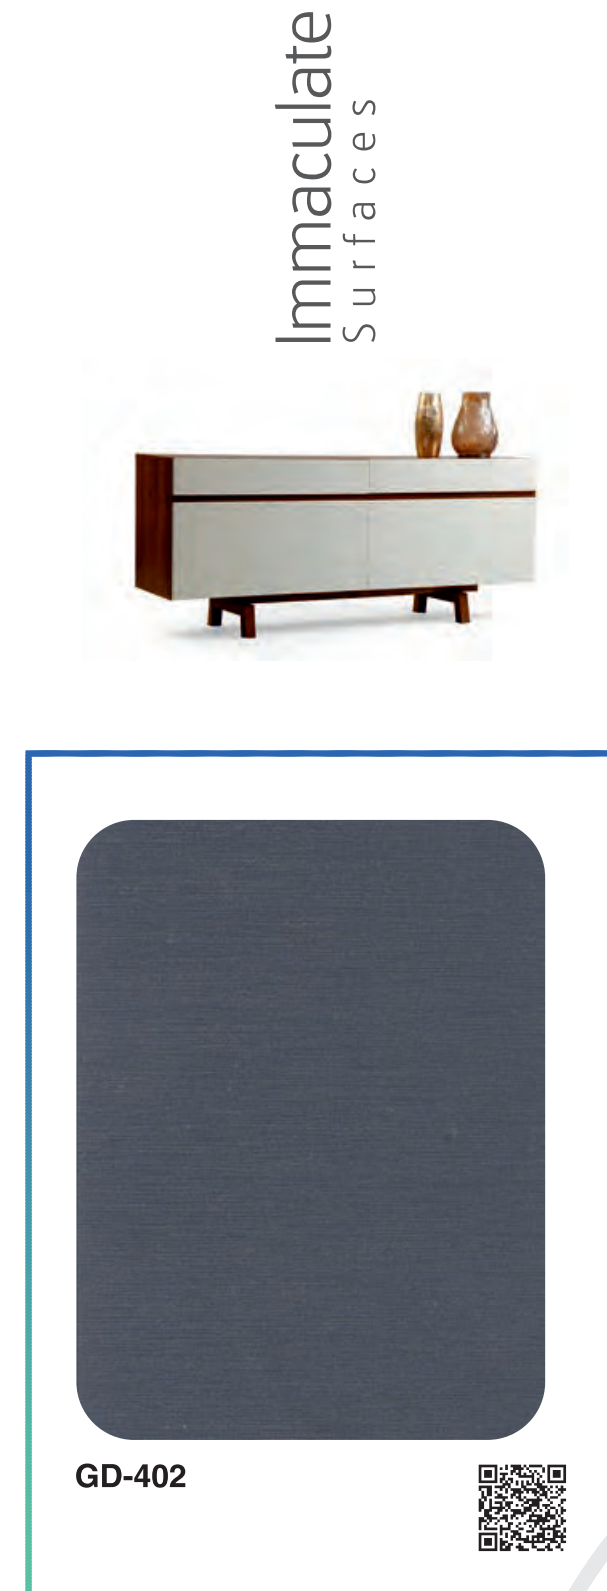
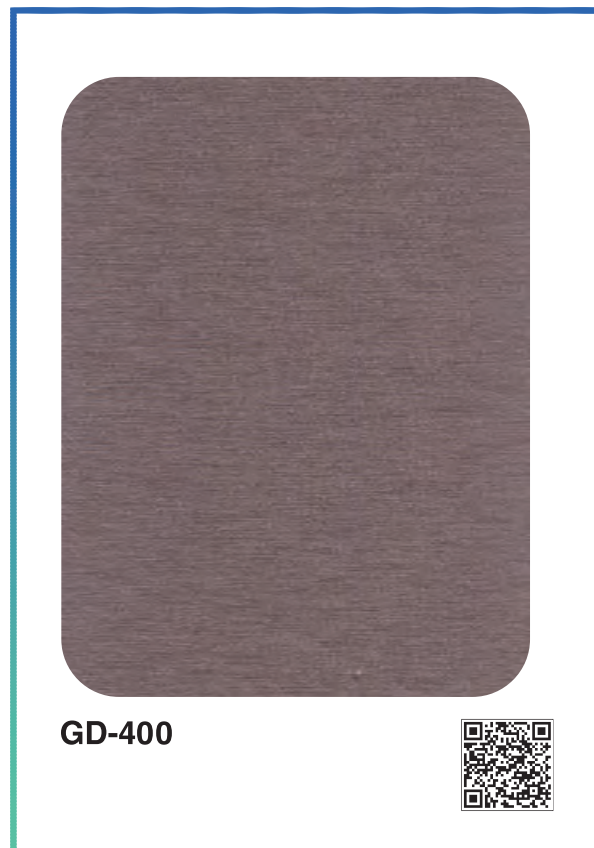
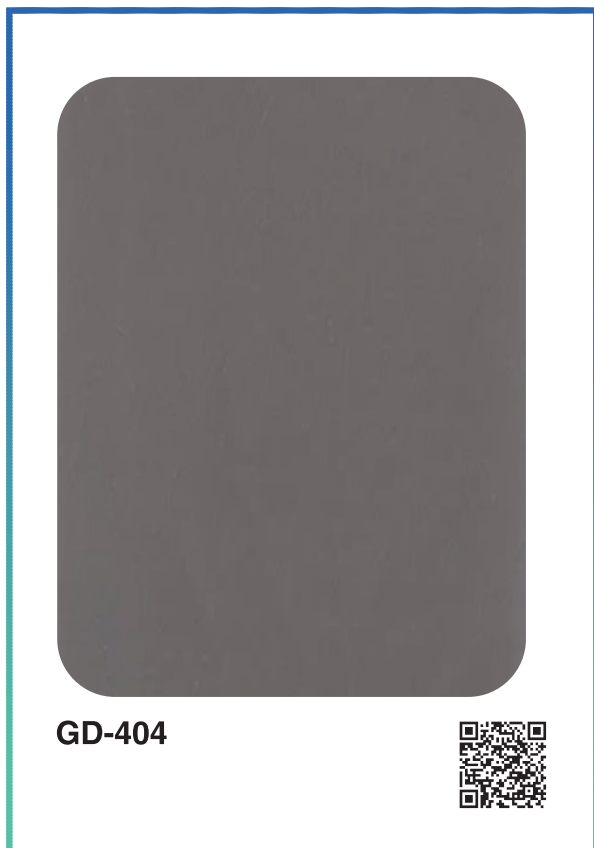






Exclusive The splendid feel of these surfaces are way beyond the ordinary.

*There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variation. Actual colour of the laminate sheet may vary from this brochure.

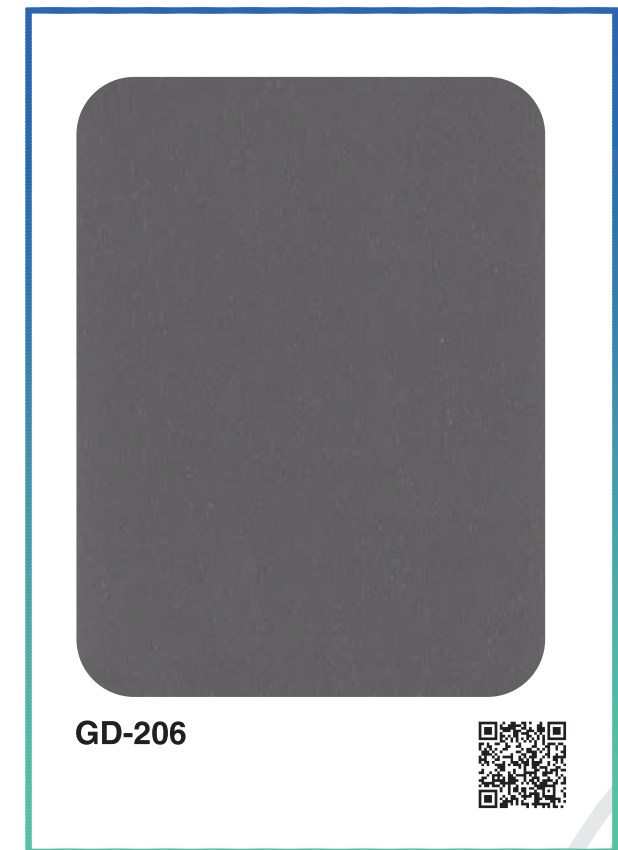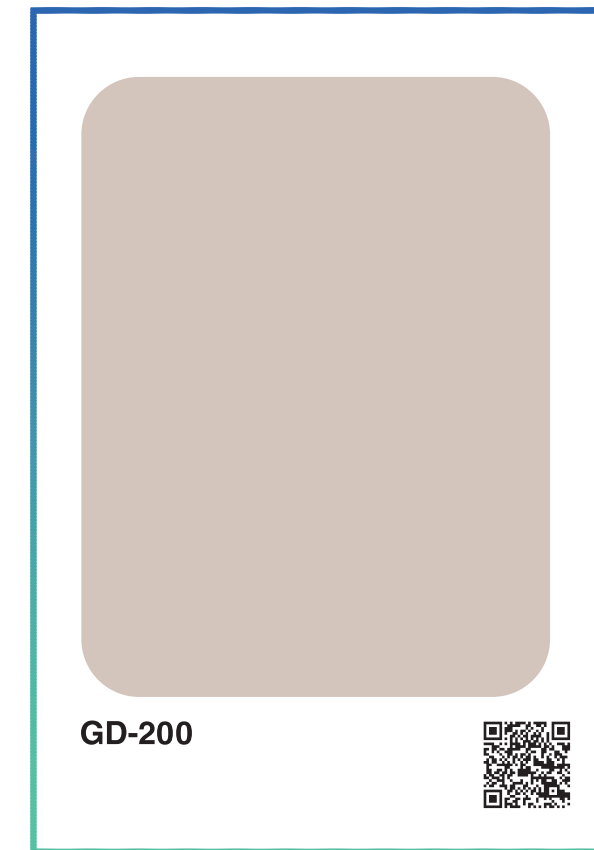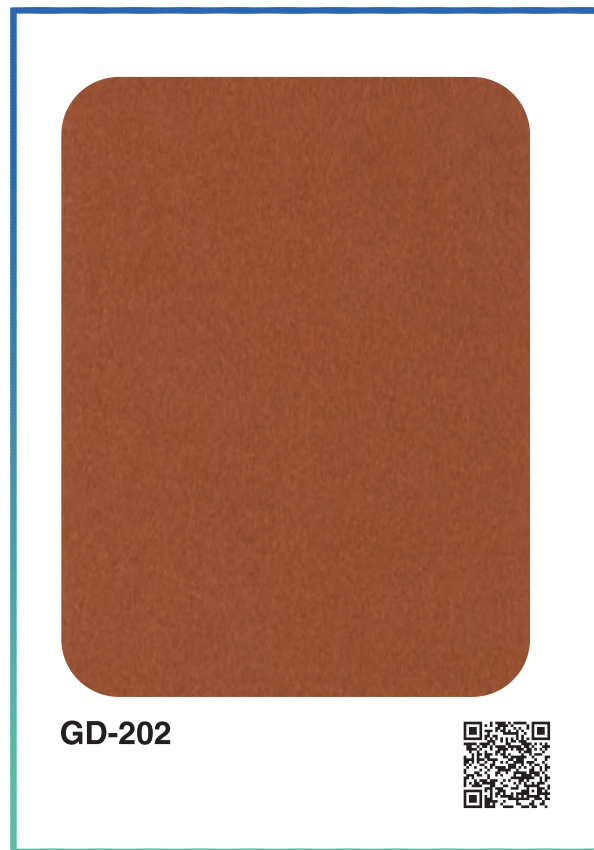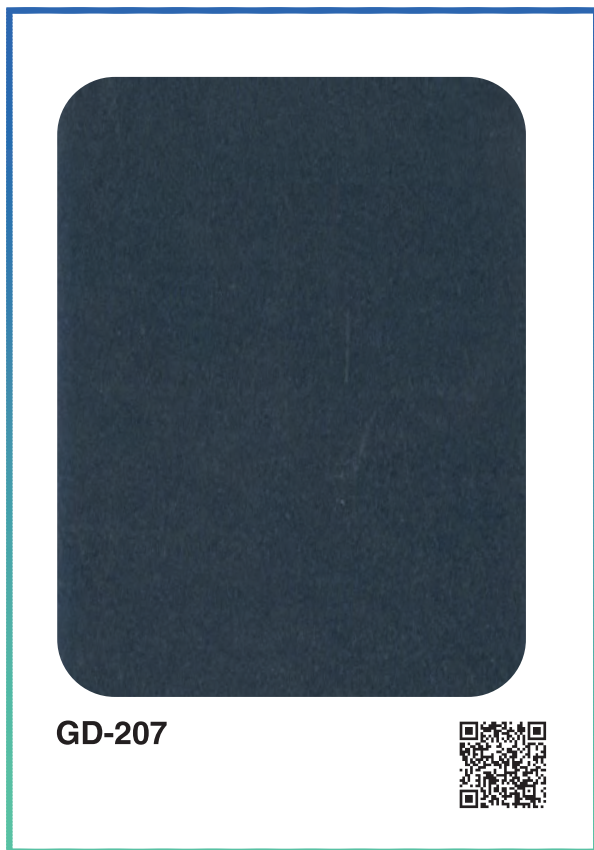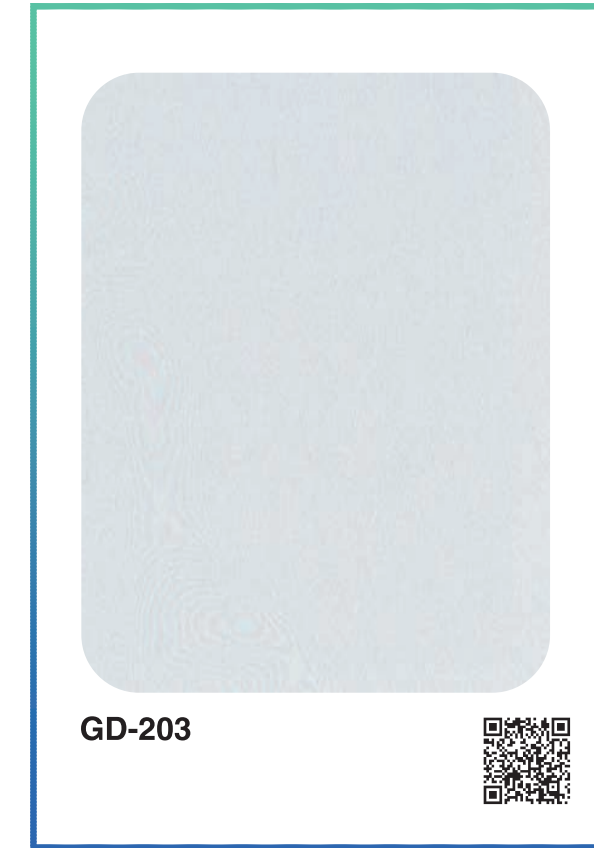

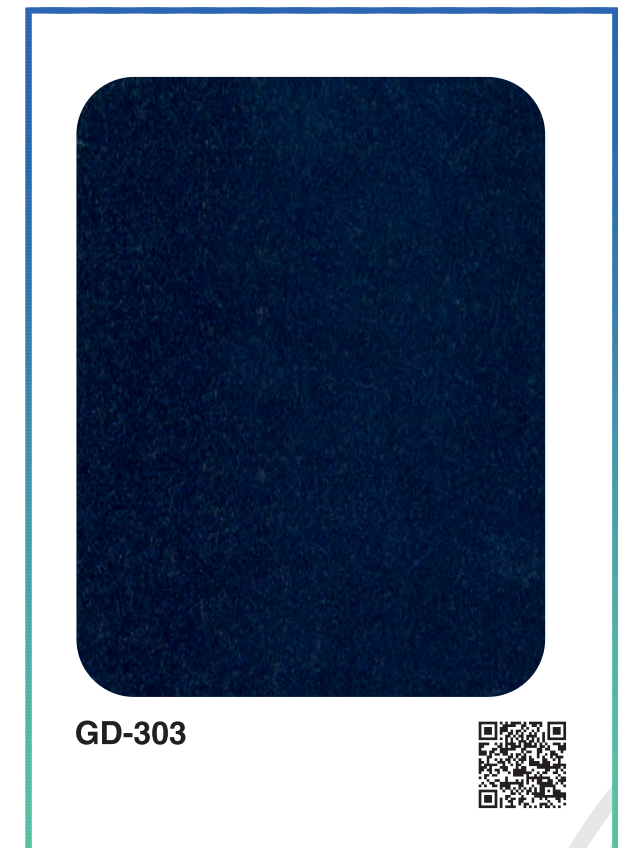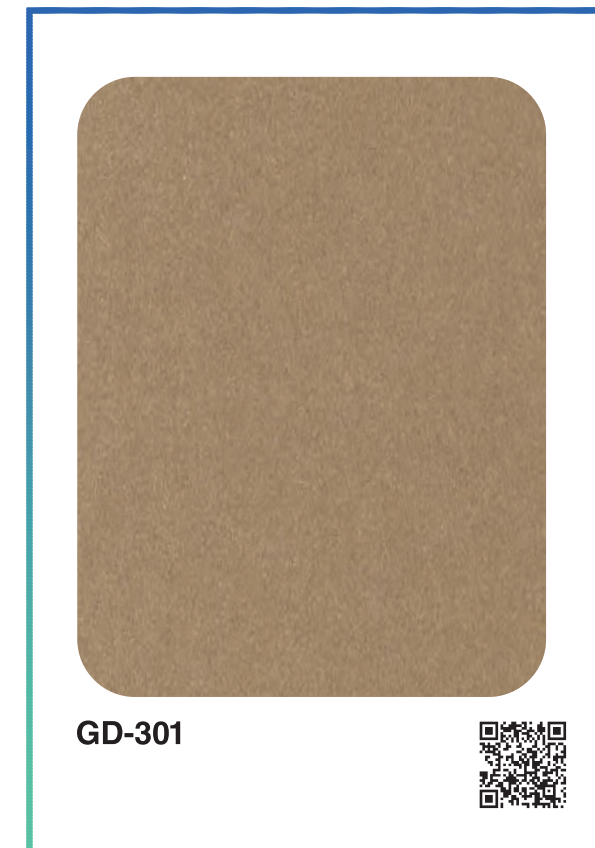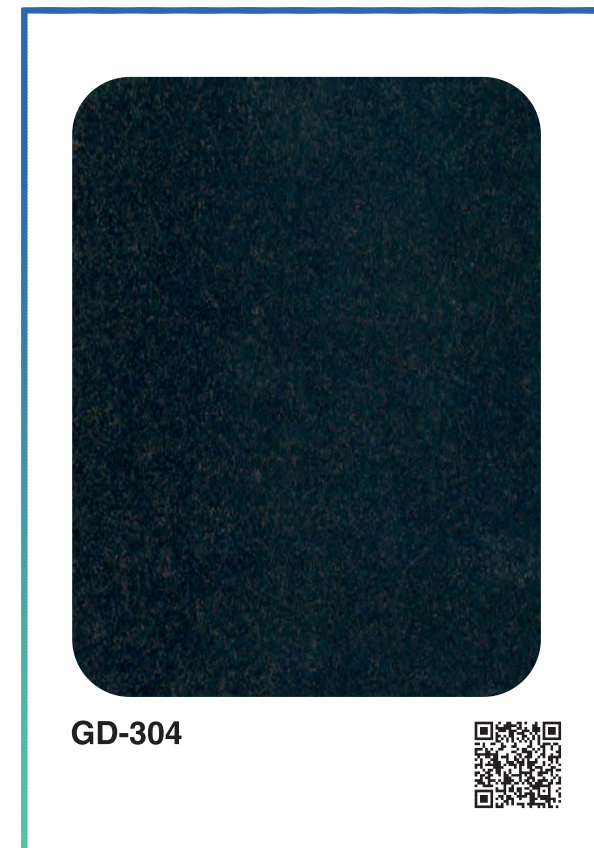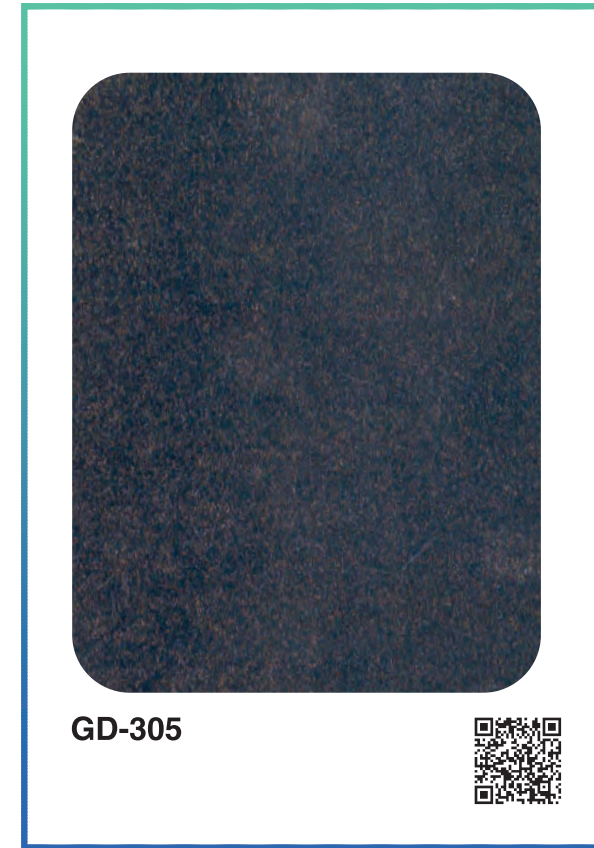

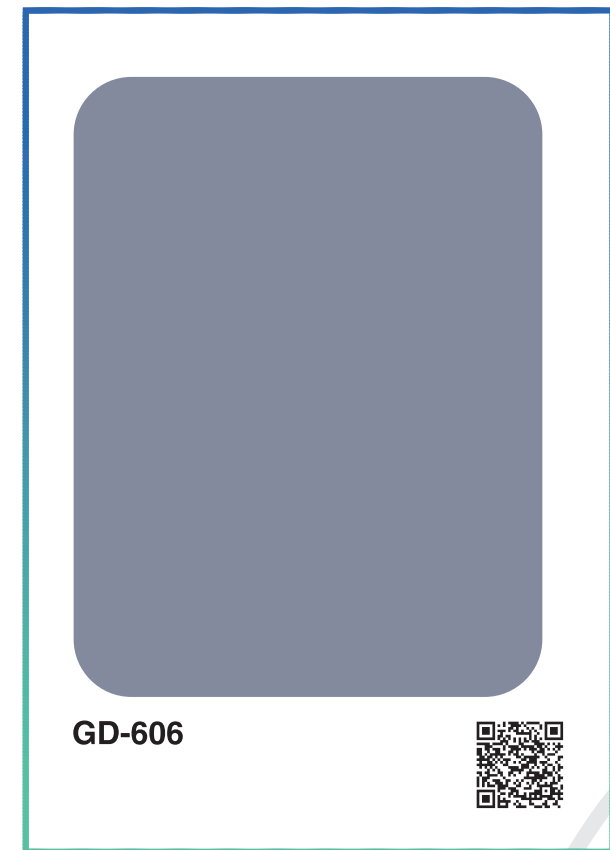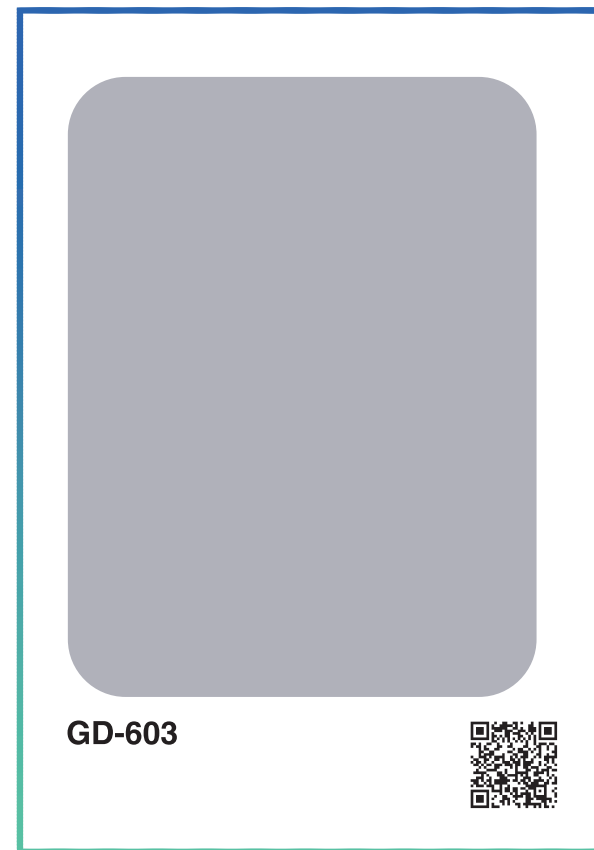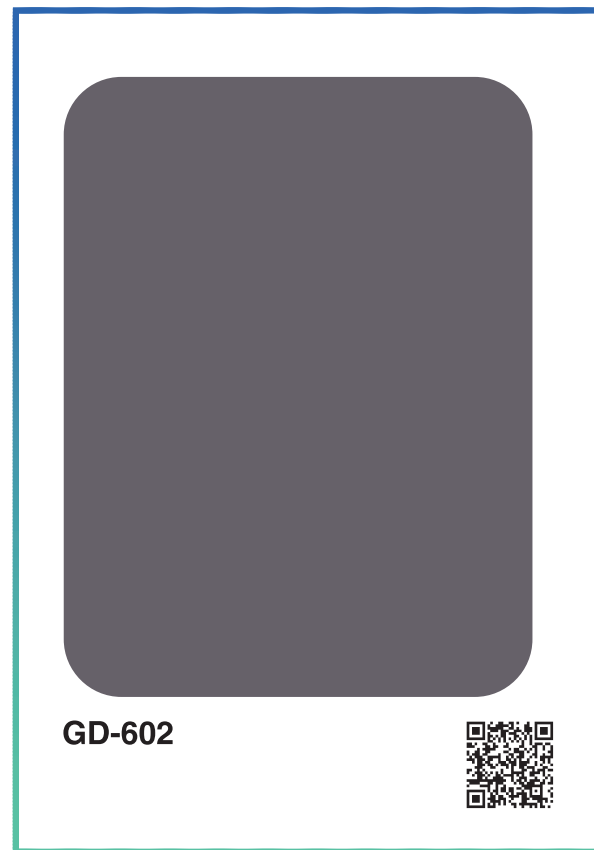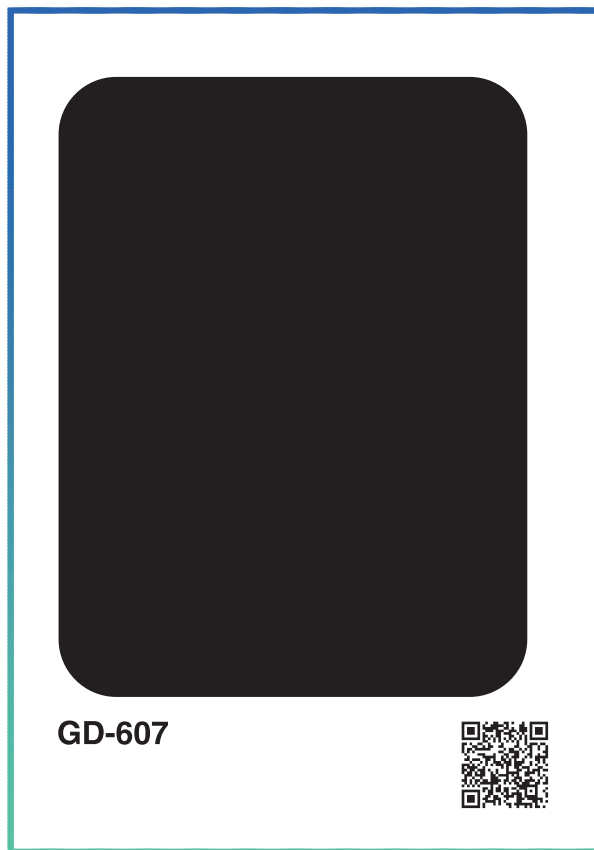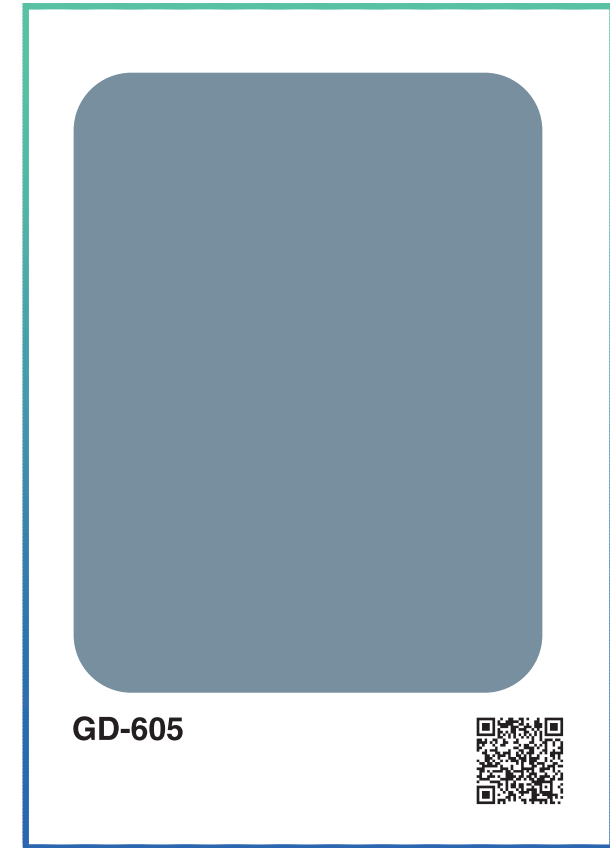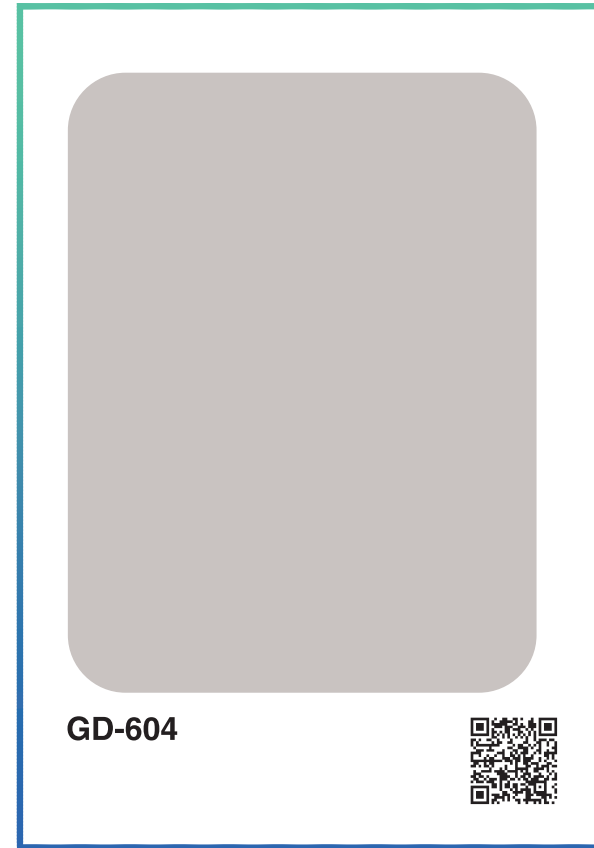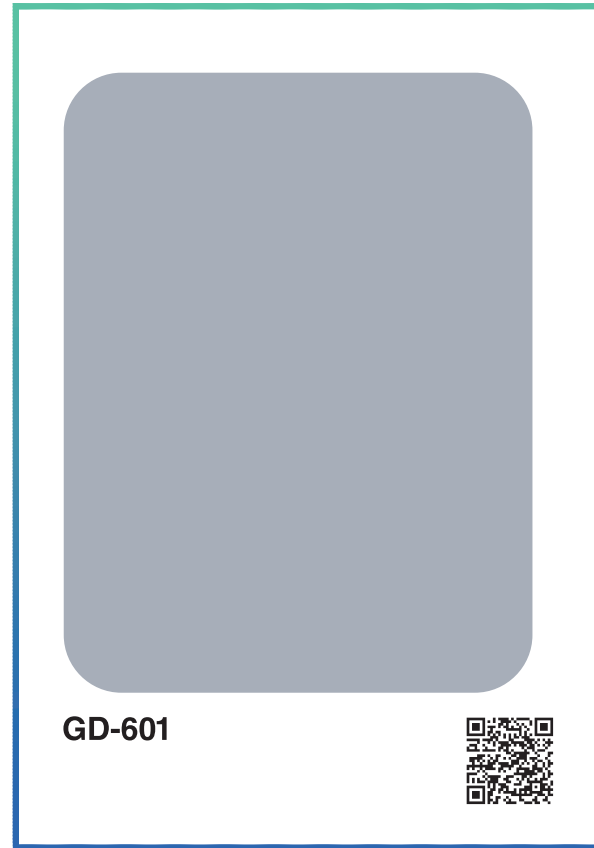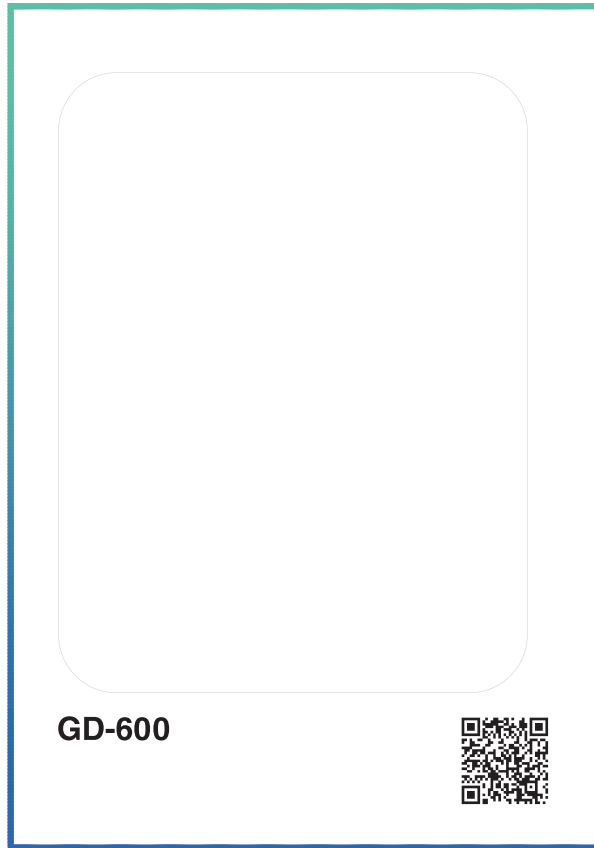

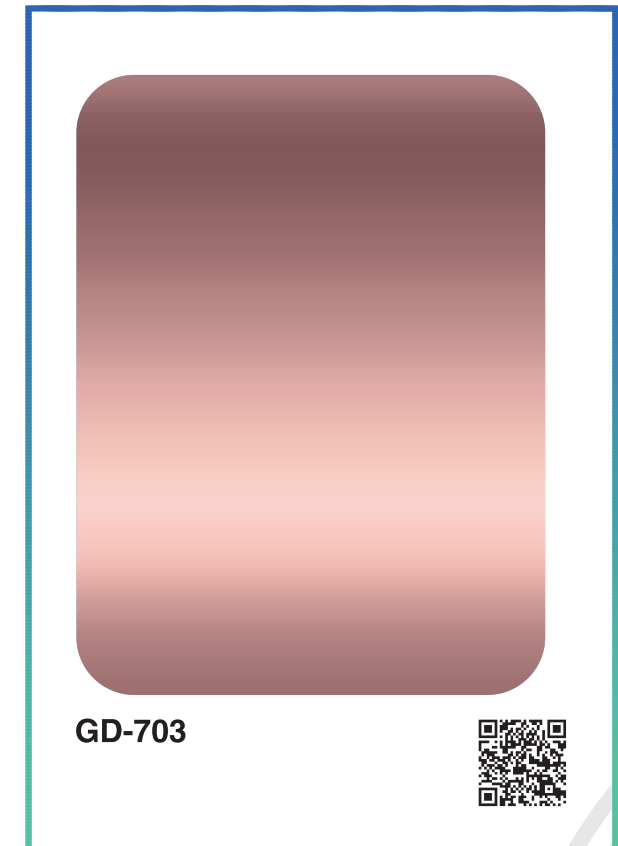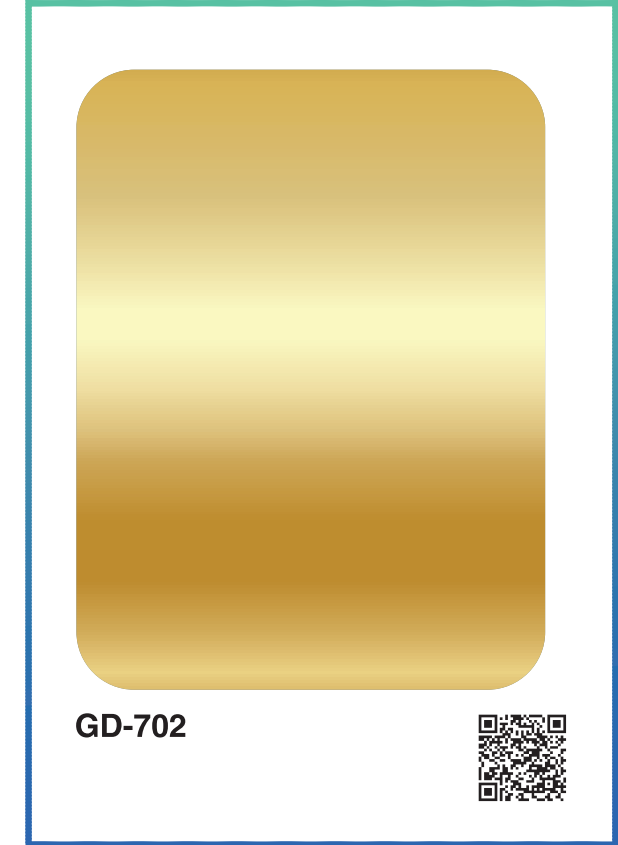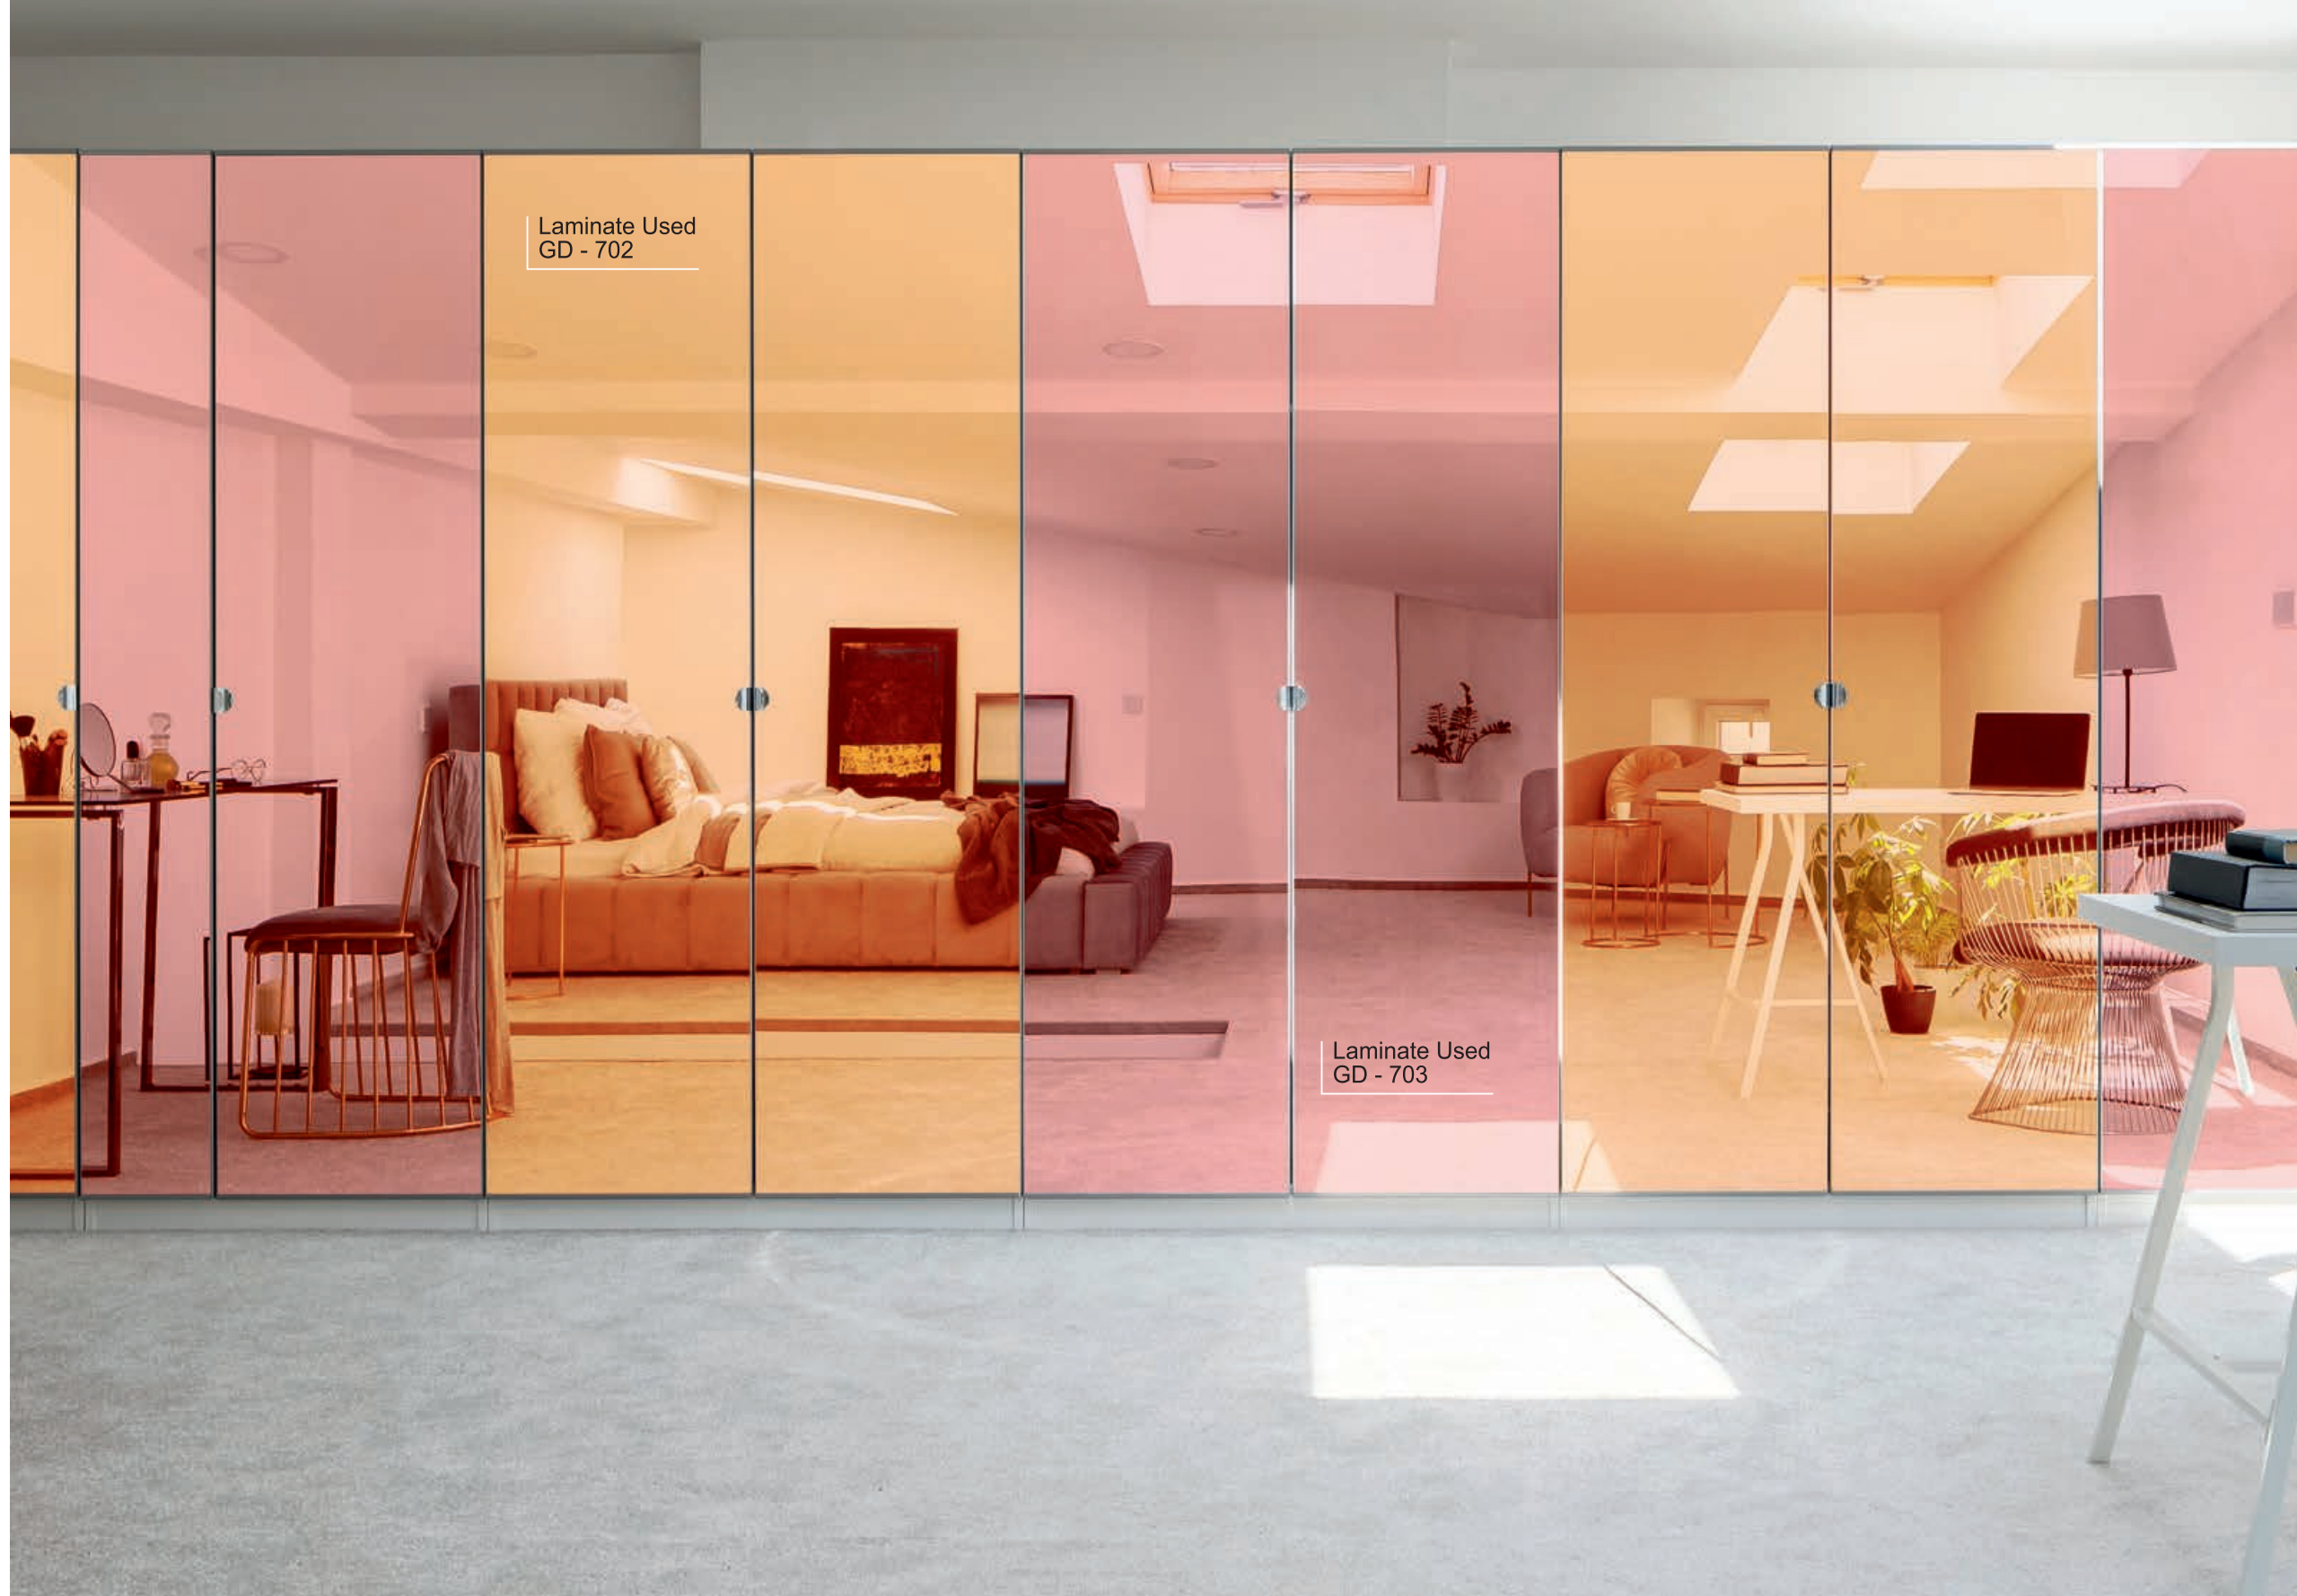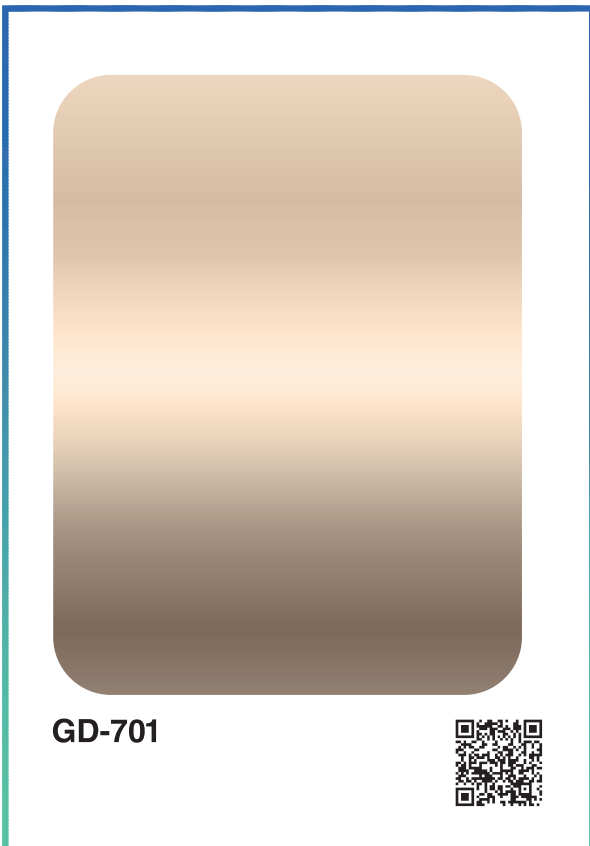

FOLLOW INSTRUCTIONS

PLEASE FOLLOW THE INSTALLATION AND MAINTENANCE TIPS:

1. Before buying please check **Glamid** sticker on the product and ensure that you bought original product of **Glamid**
2. Check the laminate on the time of delivery whether it has not damaged during transportation and handling and then use for installation.
3. Before installation make sure the substrate (MDF, Plywood, Particle Board) is in good quality, with even surface and calibrated thickness.
4. Clean the substrate surface by cloth, sponge, soft brush or sand paper to make free from dust or grease.
5. It can be easily pasted by using good quality acrylic to wood adhesive which are available in the market.
6. Spread the adhesive uniformly on both **Glamid** laminate and base substrate by brush, roller or adhesive spreader.
7. Keep at least 2MM groove between 02 pieces of **Glamid** laminates, so at the time of pressing it will be easy to remove air between the **Glamid** laminate and base substrate. Use soft pinch roller or normal pressing technique and the pressing should be done from the middle of the panel and move towards the side line and corners.
8. Please make sure to give sufficient amount of pressing to **Glamid** laminate for almost 12 hrs to 15 hrs to achieve full bonding strength.
9. Remove the protective film within 7-15 days after completion of installation

DO'S & DON'T'S

1. Store the laminae below 30°C temperature. to avoid the inside cracks & stretch line. do not store acrylic sheet in roll form.
2. Clean the surface of laminate with water and clean, non-abrasive cloth. We recommend cleaning with COLIN glass cleaner and soft Micro fibre cloth.
3. Glossy surfaces recommended to use in vertical applications.
4. Do not use cleaners based on alcohol, solvent, petrol, pinewood or oil as these may damage the surface of the laminate. Do not use cloth other than micro fibre.
5. Do not use thinner on the surface of **Glamid** laminates.
6. Do not place hot cookware directly on the laminate as the exposure to temperatures above 30°C may cause damage to the laminate surface.
Outdoor application of the laminate with exposure to direct sunlight and weather conditions are strict not recommended. UV rays may de-shape the laminate.


IMPORTANT INFORMATION:

- AIR BUBBLE FORMATIONS ON LAMINATE:



- * Use the correct adhesive for pasting of laminate to avoid air bubbles after installation.
- * Bonding of acrylic laminate under high humidity atmosphere.
- * Using uneven surface substrate (Plywood, MDF, Particle Board) Lead to debond at particular area of acrylic laminate and air bubble appear at that area after the installation.
- * Due to uncertain weather conditions, base substrate may absorb moisture and after few days of installation base substrate gradually loses moisture resulting in air bubble formation between acrylic laminate and substrate.
- * Lack of bonding / pressing during the time of installation of acrylic laminate may lead to air bubble.
- * **Glamid** acrylic laminates should be kept evenly straight. If the laminates are in roll form, it should kept straight for minimum 48 hours and then can press and laminate on the surface for better results.

- YELLOW PATCHES AND COLOR FADE:



- * Using of interior quality of dipped plywood & dipped lipping patti can react with adhesive which may cause yellow patches after the installation.
- * When Acrylic laminate experiences or faces direct to sunlight, it may cause discolouring, fading and yellowness in laminate.
- * Prolonged exposure temperature above 30°C or placing hot cookware directly on the acrylic laminates cause patched on the surface.
- * Using synthetic rubber adhesive (SR / JatPat, Bostic, Heatex) lead to brown / patches on acrylic laminate.

(Thickness : 1.5mm (±10 - 15%))

TECHNICAL SPECIFICATIONS



Parameters	Acrylic Laminate	High Gloss Laminate Mica	PU Coating / Duco Paint	Back Painted Glass
Gloss Level	>90	>70	>85	>85
Scratch Proof	6H Antisractch	No	No	No
Color Consistency	Excellent	Not Good	Not Good	Not Good
Orange Peel	No	Yes	Yes	No
UV Resistance	Excellent	Bad	Bad	Bad
Water Resistance	Excellent	Bad	Bad	Excellent
DRY Heat Resistance	Excellent	Good	Bad	Bad
Volatile Organic Compounds (VOCs)	No	Yes	Yes	Yes

100% SCRATCH PROOF
ACRYLIC COLLECTION

60+ LIVE COLORS | 6H GRADE | 1.5mm THICKNESS

MATCHING
EDGE BAND
AVAILABLE



LIMITED WARRANTY:

Glamid products are reasonably free of defects and when properly handled and fabricated will comply, within reasonable deviations to applicable manufacturing specifications. Clients are advised to inspect product thoroughly prior to installation. Glamid warranty will not cover defects and non-compliance from otherwise attributable to any other causes, including without limitation:

- * Improper handling / transportation / storage of the products.
- * Improper installation and unintended usage of the products.
- * Lack of / or improper maintenance of the products.
- * Exposure of the products to extreme temperatures.
- * Unauthorized alteration to the products.
- * Outdoor applications.

- * No guarantee and no exchange in any circumstances.
- * There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variations. Actual colour of the acrylic sheet may vary from this brochure.

Our Products Range

Charcoal Louvers

Acrylic Sheet

Acrylic Edge Band

Charcoal Moulding



RETRO

SERIES

ELGANCE

P E R S O N I F I E D

**100% SCRATCH PROOF
ACRYLIC COLLECTION**

60+
LIVE
COLORS

6H
GRADE

1.5
THICKNESS

Follow us



Scan to
Download
E-Catalogue

Glamid Decor Pvt. Ltd.

D-25, Site-4, UPSIDA, Greater Noida-201310
www.Glamiddecor.com
Glamiddecor@gmail.com